
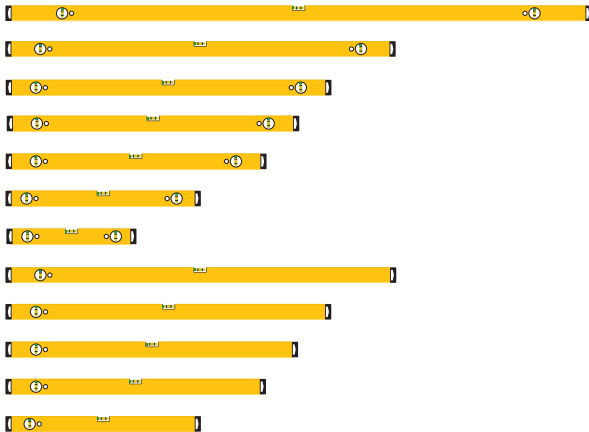


L53 & L50 GENERAL DUTY LEVELS



Standard duty levels suitable for exterior and interior work. Lightweight yet extremely tough, the solid acrylic vials are fade and leak resistant.

L53 & L50 SPECIFICATION

- 520g/m general duty profile.
- Accuracy +/- 1.0mm/m = 0.057° in standard position.
- L53 - One horizontal and two plumb acrylic block UV and anti-static resistant vials.
- L50 - One horizontal and one plumb acrylic block UV and anti-static resistant vials.
- Vials guaranteed for 30 years against leakage.

PRODUCT CODES

LENGTH	L53	L50
180cm/72in	L53-180	
120cm/48in	L53-120	L50-120
100cm/40in	L53-100	L50-100
90cm/36in	L53-090	L50-090
80cm/32in	L53-080	L50-080
60cm/24in	L53-060	L50-060
40cm/16in	L53-040	

L25 ANGLE SETTING LEVELS



The ideal level for setting angles. The fully adjustable end vial can be set to percentages or degrees. The perfect tool for setting or checking slopes.

L25 SPECIFICATION

- 520g/m heavy duty profile.
- Accuracy +/- 0.5mm/m = 0.029° in standard position (+/- 1.0mm/m when inverted).
- One horizontal, one plumb and one angle setting solid block UV and anti-static resistant vials.
- Horizontal vial has luminous backing plate and magnifying lens.
- Vials guaranteed for 30 years against leakage.

PRODUCT CODES

LENGTH	L25
120cm/48in	L25-120
90cm/36in	L25-090
60cm/24in	L25-060